

VuOxi Floating Aerator 22 kW (30 hp)

VuOxi Floating Aerators are CE marked products from Finland.

Technical data

Oxygen transfer efficiency	Up to 2,0 kgO ₂ /kWh* (3.2 lbO ₂ /hp-hr)
Spray pattern diameter	Appr. 7,0 m (23,0 ft)
Motor	3-phase customized motor manufactured by Lönne or equal (CE, UL and CSA approved)
Nominal power	22 kW (30 hp)
Efficiency class	IE3
Insulation class	F
V/F	50 Hz: 400 V +- 5 %, 42 A; 60 Hz: 460 V +- 5 %, 36,5 A
Electrical cable	4G16 European standard cable. Note: Length and local electrical control system may affect. When using AC-drive EMC-cable or shielded cable is required
Main dimensions	2800 mm x 2800 mm x 1600 mm (110.2" x 110.2" x 63.0")
Weight of aerator with floats	Appr. 620 kg (1367 lb)
Materials	<ul style="list-style-type: none"> × Metals AISI 304 × Impeller alloyed special bronze and plastic × Float PE-plastic × Intake pipe** PE-plastic and stainless steel

Optional features

Frequency converter (AC-drive)


- × Protection class IP21 or IP55
- × Automatic impeller cleaning cycle feature

Metal parts AISI 316

Intake pipe screen

Lifting frame

Shallow pond protect

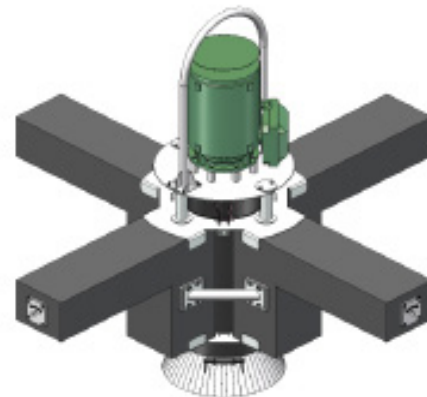

* Oxygen measurement accuracy ± 15 %

** Customer must define the length of the intake pipe (the pipe should be 1,5 – 2,5 m / 4.9 - 8.2 ft above the bottom of the basin, depends on basins material).

Information without engagement. All rights to changes without prior notice reserved.