

## VuOxi Floating Aerator 55 kW (75 hp)

VuOxi Floating Aerators are CE marked products from Finland.

### Technical data

Oxygen transfer efficiency	Up to 2,0 kgO <sub>2</sub> /kWh* (3.2 lbO <sub>2</sub> /hp-hr)
Spray pattern diameter	Appr. 8,5 m (27.9 ft)
Motor	3-phase customized motor manufactured by Lönne or equal (CE, UL and CSA approved)
Nominal power	55 kW (75 hp)
Efficiency class	IE3
Insulation class	F
V/F	50 Hz: 400 V +- 5 %, 106 A; 60 Hz: 460 V +- 5 %, 92 A
Electrical cable	4G35 European standard cable. Note: Length and local electrical control system may affect. When using AC-drive EMC-cable or shielded cable is required
Main dimensions	3250 mm x 3250 mm x 2200 mm (128.0" x 128.0" x 86.6")
Weight of aerator with floats	Appr. 1300 kg (2866 lb)
Materials	<ul style="list-style-type: none"> <li>× Metals AISI 304</li> <li>× Impeller alloyed special bronze and plastic</li> <li>× Float PE-plastic</li> <li>× Intake pipe** PE-plastic and stainless steel</li> </ul>

### Optional features

Frequency converter (AC-drive)


- × Protection class IP21 or IP55
- × Automatic impeller cleaning cycle feature

Metal parts AISI 316

Intake pipe screen

Lifting frame

Shallow pond protect

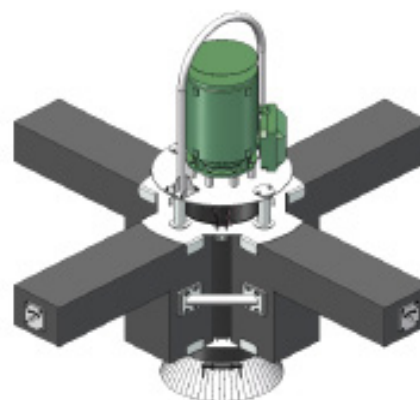

\* Oxygen measurement accuracy  $\pm 15\%$

\*\* Customer must define the length of the intake pipe (the pipe should be 2,0 – 3,0 m / 6.6 – 9.8 ft above the bottom of the basin, depends on basins material).

Information without engagement. All rights to changes without prior notice reserved.